




# BIOS Changing the battery of why! W253EU (German)


BIOS Replace the battery (BIOS is the software that allows the loading of the operating system of your computer).

Written By: Felice Suglia

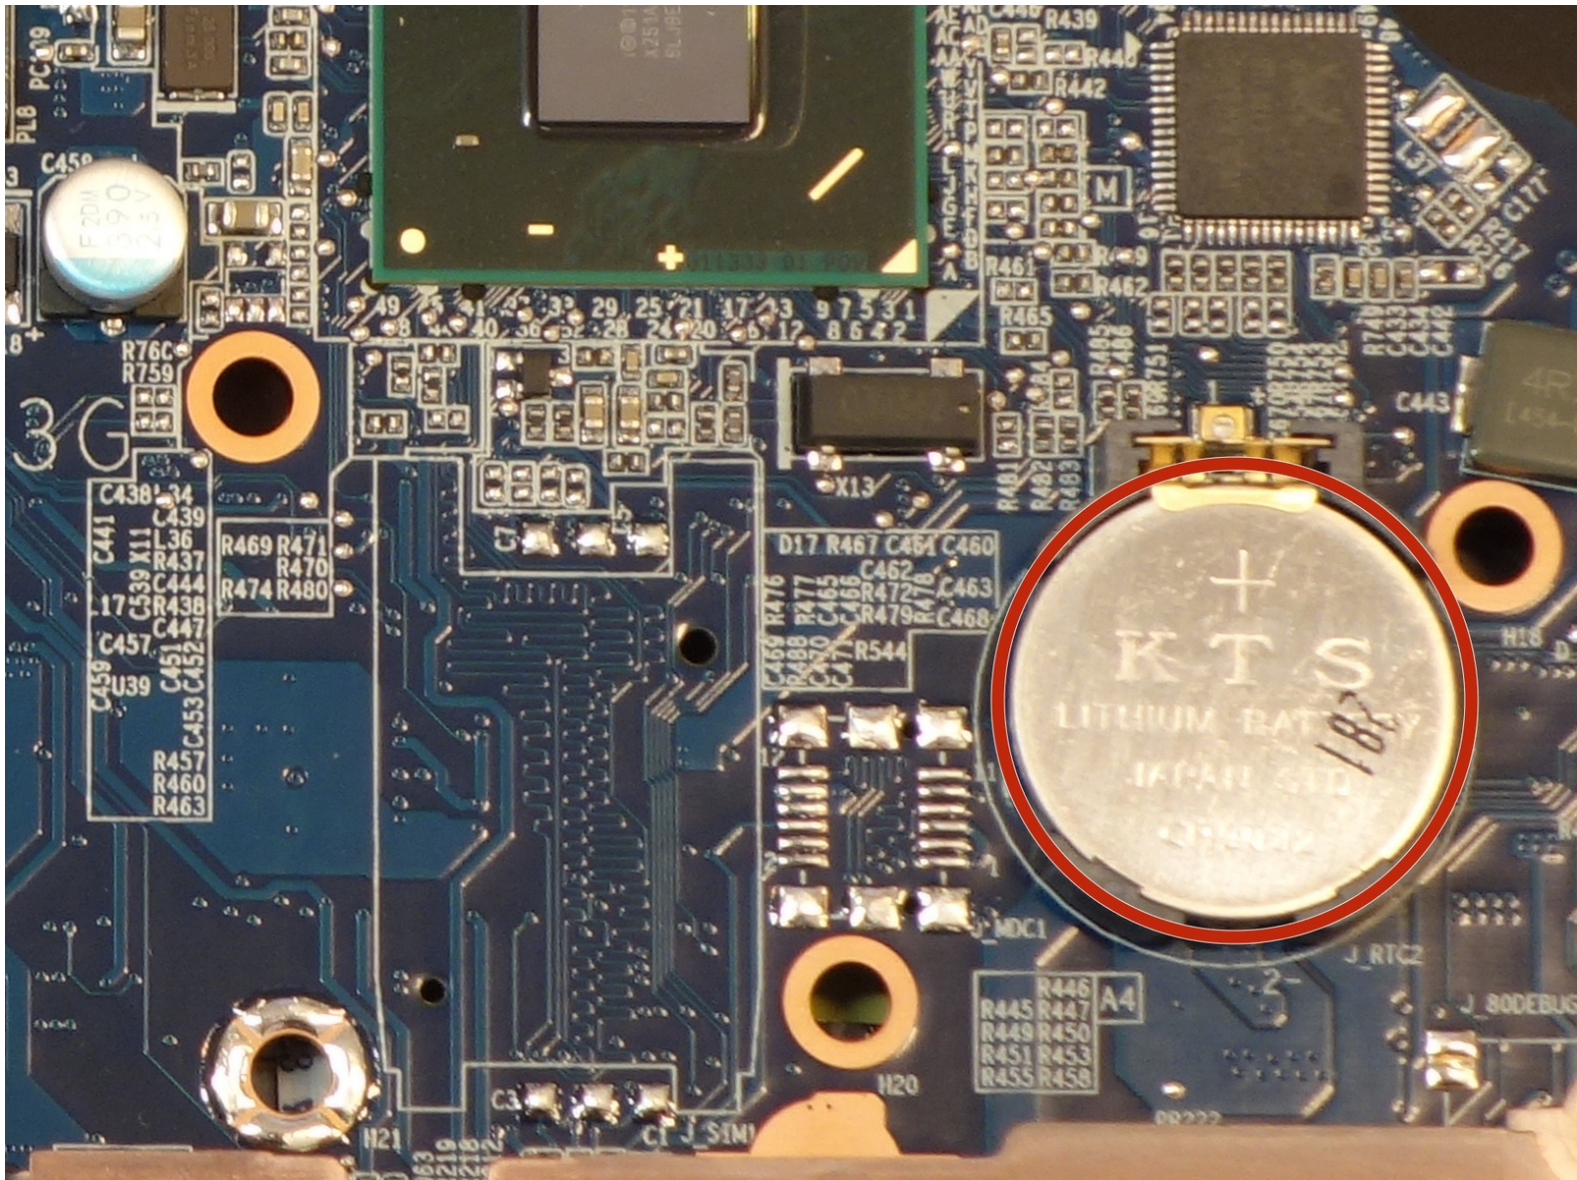




## Step 1 — battery pack

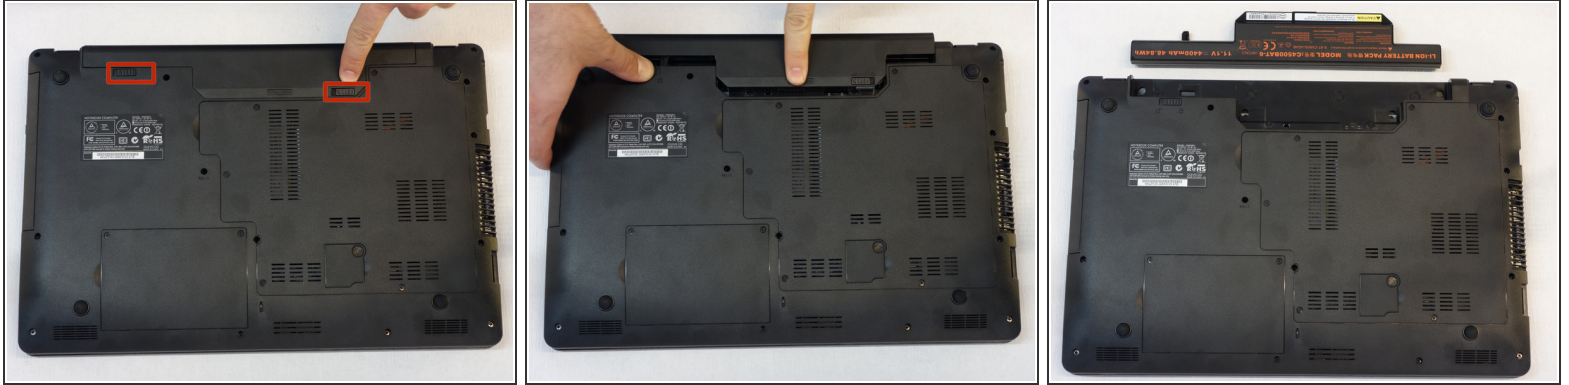


- off computer.
- Before each handle, it is important to start the expansion of the accumulator.
- bring in unlocked position slider Removing the battery.

## Step 2 — Access to RAM memory and CPU

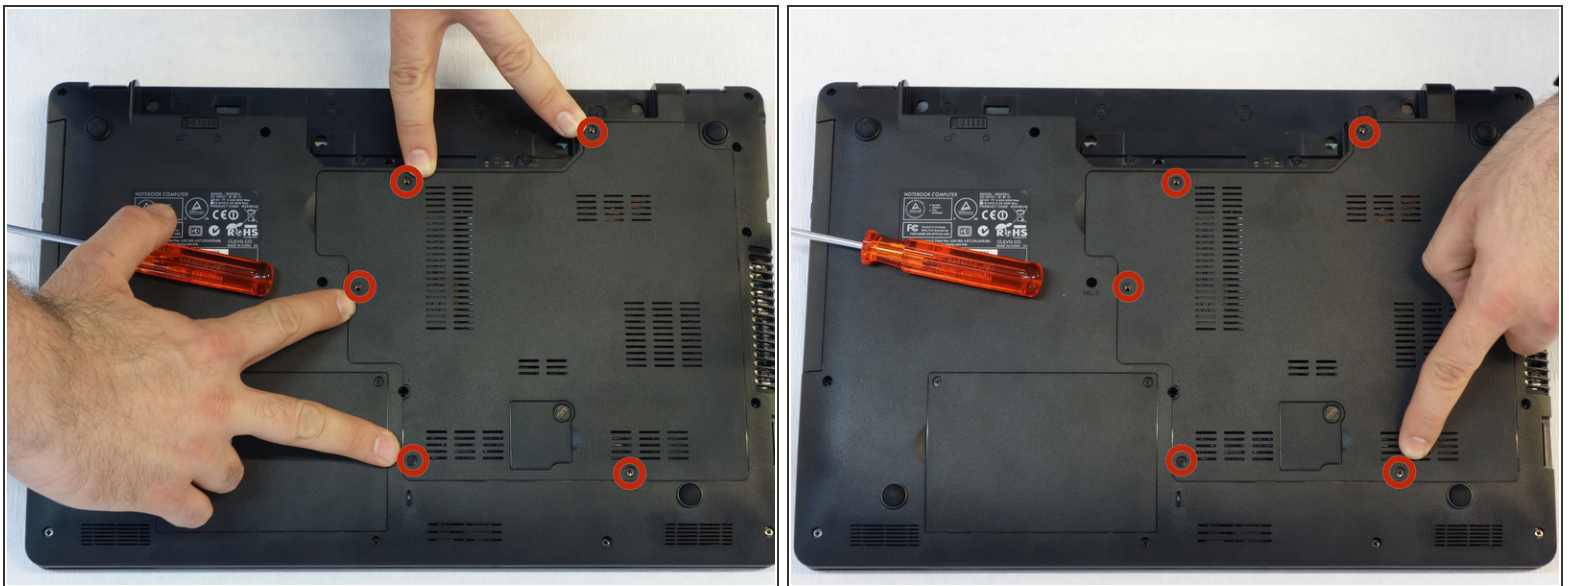


- With the screwdriver Philips # 1, screw the 5 screws securing the cover off.

## Step 3

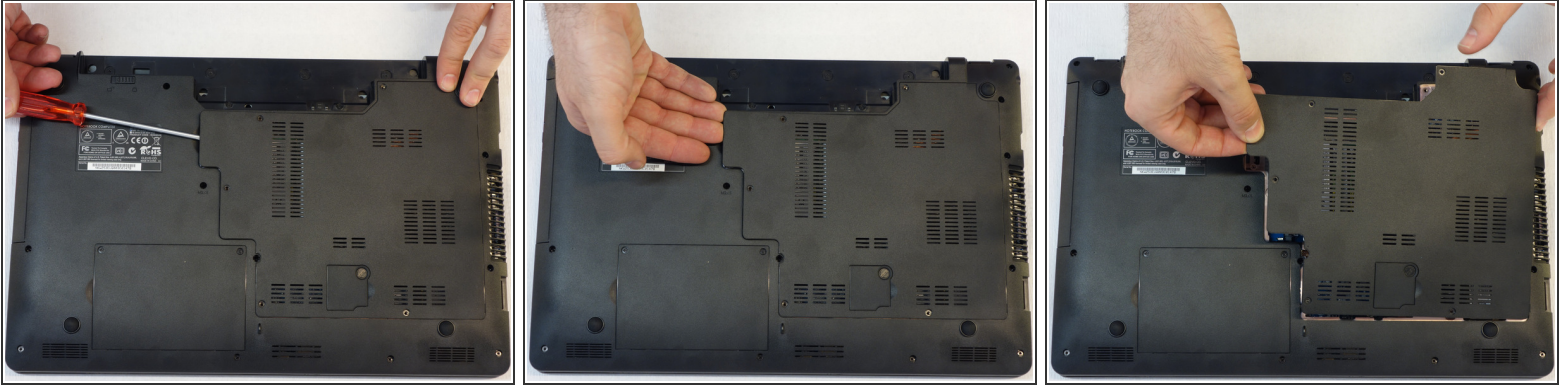

- Screwdriver a few millimeters under the cover slide so that it can then be handled with the fingers.
- Cover now lifting carefully.
- Attention! Ventilatorkabel separate so that the cover can be removed completely (see next step).

## Step 4

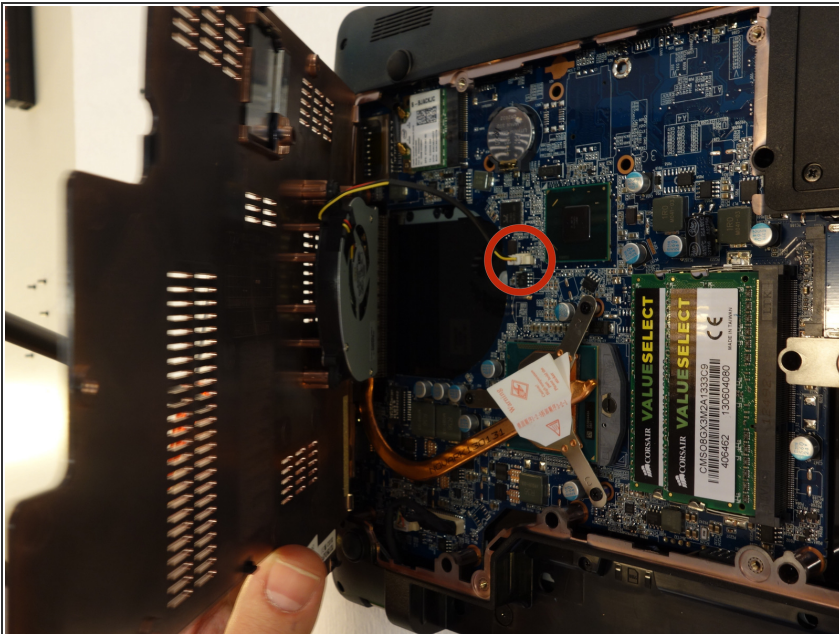

- Since the ventilátor is fixed under the cover, be power cord must first be separated so that the cover can then be completely removed.



## Step 5 — Battery BIOS



- BIOS battery carefully removed from its holder.
- Do not discard the battery! In Switzerland, the electrical specialty shops are obliged all batteries and accumulators to accept for disposal.

Für den Zusammenbau die Instruktionen in umgekehrter Reihenfolge ausführen.

This document was last generated on 2017-06-19 12:54:00 AM.